FINAL
ENVIRONMENTAL IMPACT STATEMENT

for the

TRI-LAKES RELIABILITY PROJECT

February 17, 2006

ATTACHMENT 10

ROCK CHECK DAM DETAIL

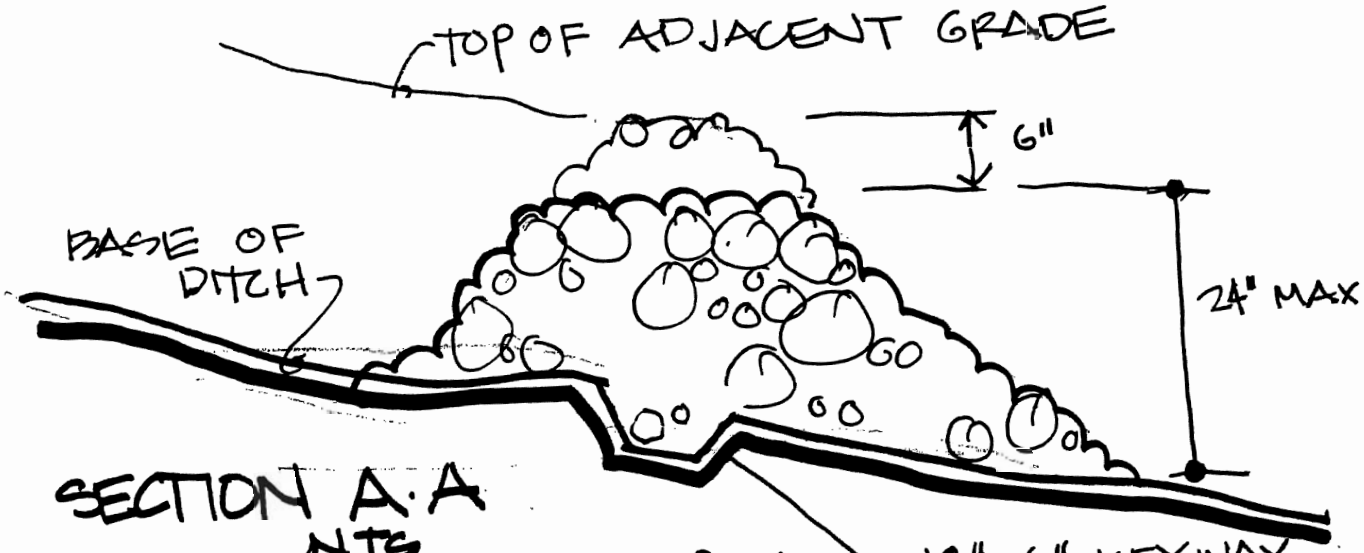

SECTION A-A
NTS

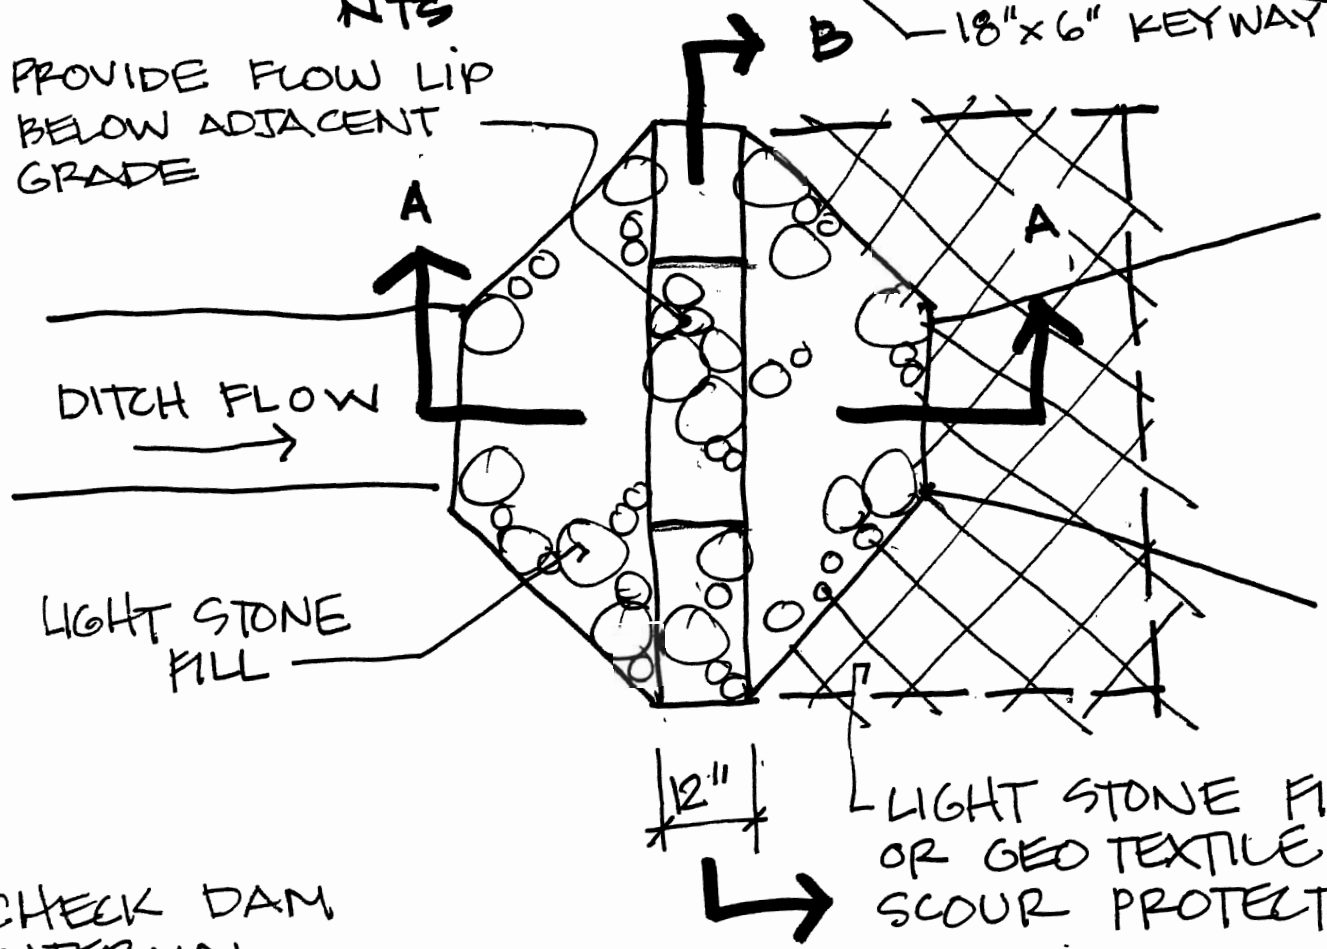

PLAN
NTS

CHECK DAM INTERVAL

DITCH SLOPE	PLACEMENT INTERVAL
< 3 %	150 FT
3 - 5 %	100 FT
> 5 %	75 FT

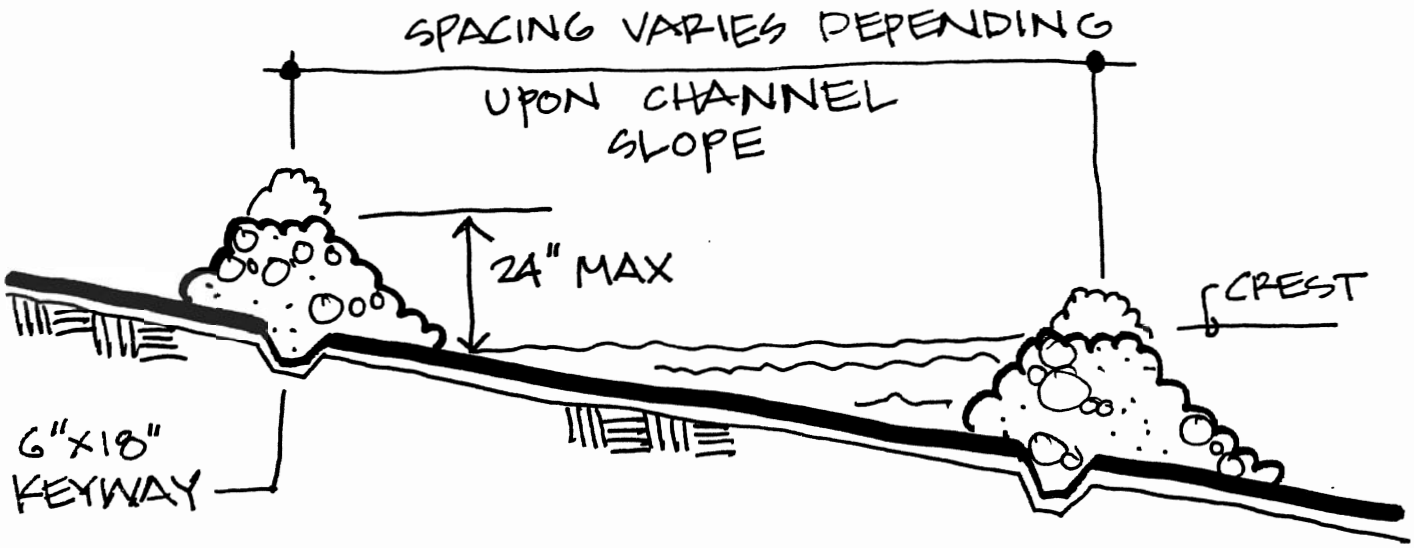

SPACE CHECK DAMS SO BASE OF UPPER DAM IS AT SAME ELEVATION AS CENTER OF LOWER DAM.

PROFILE CHECK DAM

NTS
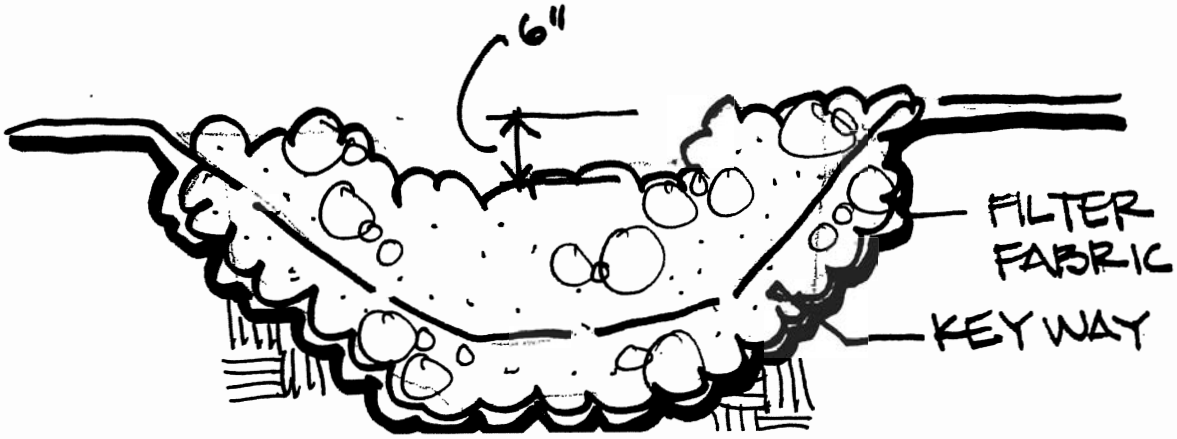
PROVIDE CHECK DAM IN ACCORDANCE WITH NYS DEC BLUEBOOK AND USDA NRCS GUIDELINES